





1/4

FIG 1A (Prior Art)

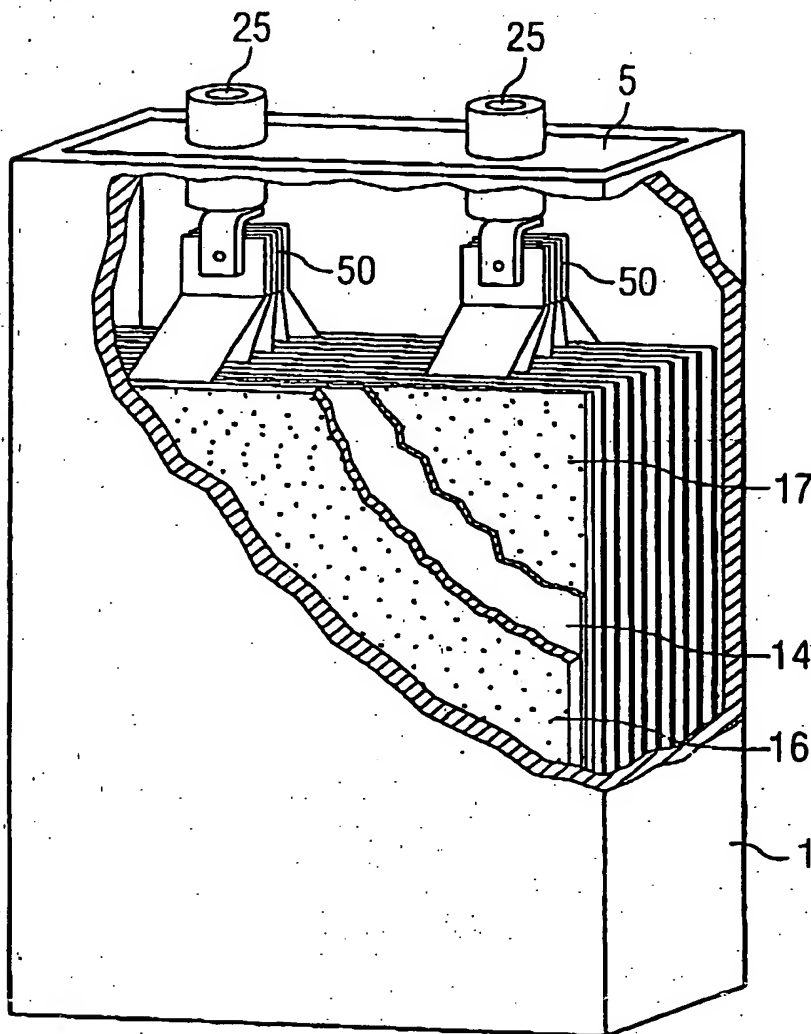

BEST AVAILABLE COPY

FIG 1B (Prior Art)

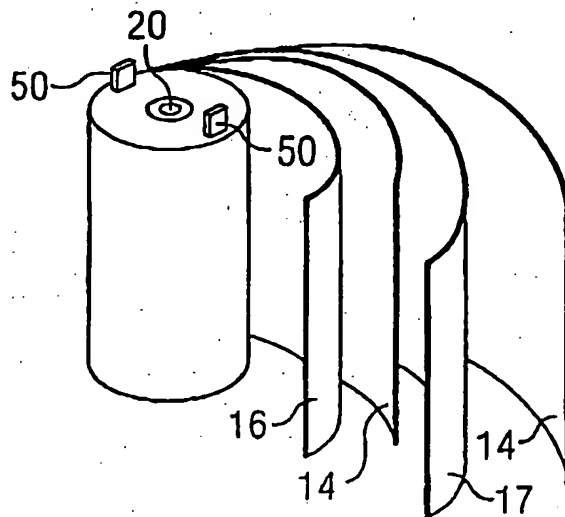

2/4

FIG 2A (Prior Art)


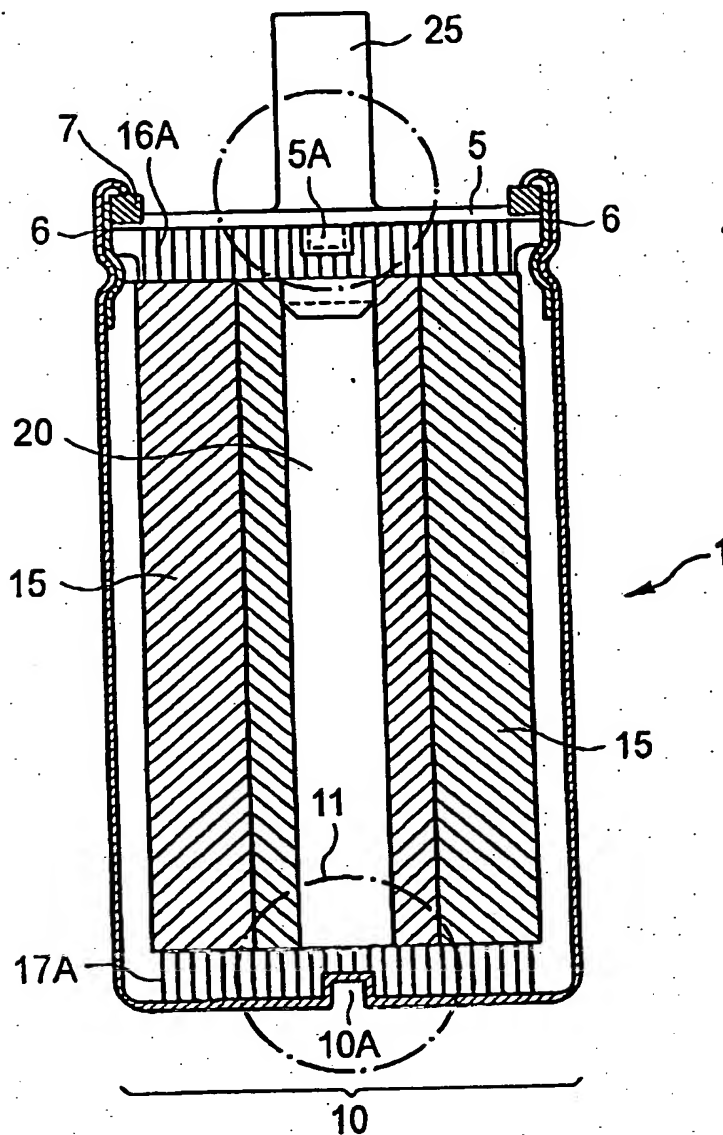


FIG 2B (Prior Art)

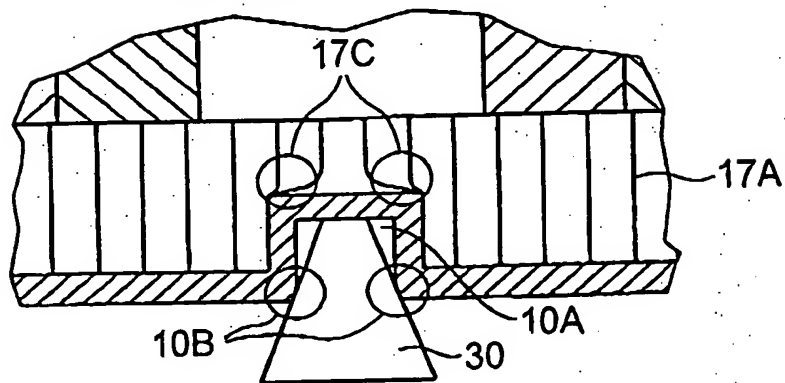

BEST AVAILABLE COPY

3/4

BEST AVAILABLE COPY

FIG 3A

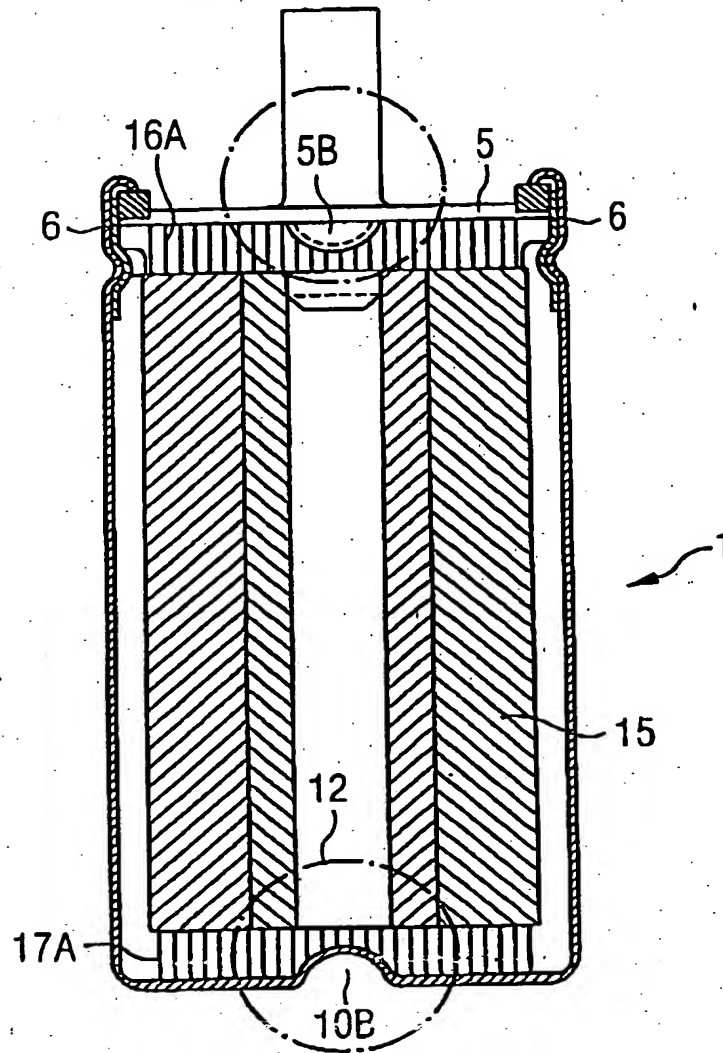


FIG 3B

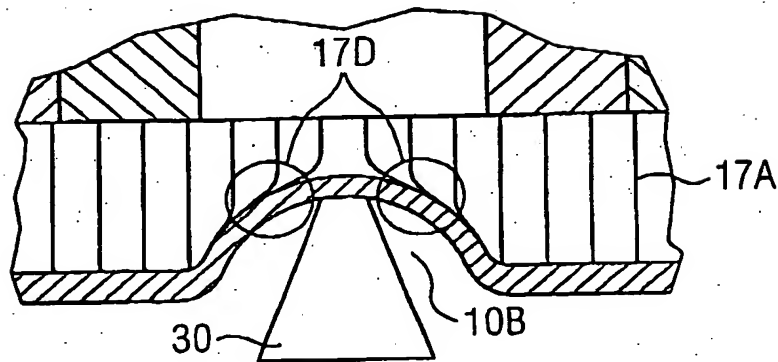


FIG 4B

FIG 4B is a top-down view of a circular device 5. The device has a central hub with six elongated, rounded rectangular spokes 5B radiating outwards. Between each pair of adjacent spokes, there is a circular element 25 containing two vertical parallel lines. The entire assembly is enclosed within a circular boundary.

**BEST AVAILABLE COPY**